

STUDIO FLASHES



DIGITAL PRO X





Photo: Dan Vojtěch



QUICK AND EASY CONTROL SYSTEM

- The F - Control app for iOS and Android makes the Pro X flashes one of the most modern studio flashes in the world.
- Convenient and fast control of all flash functions makes the photographer's job more efficient and saves time during shooting.
- Controlling 1 to 50 flashes from 1 place.
- Control software for MAC and Windows will satisfy all professionals.
- Flash settings can be saved, which enables using presets for different types of photography.

Digital Pro X 500/700/1200





FAST

The very short time needed to power up the flash makes it possible to use the Pro X system even in the 3D photo industry.

SAFE

A built-in thermometer indicating the temperature of the flash electronics will enable you to take on photographic projects with confidence.

UNIVERSAL CONSTRUCTION

Thanks to a variable construction of the flash body, the LCD panel is always turned in a way which makes it easy to read.

CLEAR

The flash counter keeps you informed about the lifetime of the discharge lamp.

SMART

5 groups/A, B, C, D, E and 10 channels 1 –10. Each flash can have its unique name in the system.



🛒 FY3447

Transmitter Pro X

For all camera brands

🛒 FY3446

Receiver Pro X





WIFI ROUTER
賈 FY3027



WIFI CONVERTER
賈 FY3448



USB TRANSMITTER PRO X
+ SOFTWARE PRO X
賈 FY3453



RECEIVER
賈 FY3446



TRANSMITTER
賈 FY3447



APPLICATION F - CONTROL



Reflectors



FY7777
Standard
Reflector
16.5 cm



FY7509
Reflector
21 cm



FY7511
Reflector
33 cm



FY7510
Beauty
Dish



FY7507
Background
Reflector



FY7488
Snoot
Reflector
7 cm



FY7506
Snoot
Reflector
5 cm

Softboxes



FY7534
Recta Box
140 x 200 cm



FY7532
Recta Box
100 x 140 cm



FY7531
Recta Box
90 x 120 cm




FY7530
Recta Box
75 x 100 cm



FY7529
Recta Box
60 x 85 cm




FY7557
Octa Box
200 cm

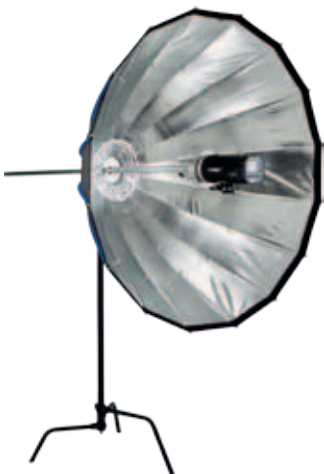

FY3565
Click Box
Zoom 180 cm



FY3564
Click Box
Zoom 140 cm

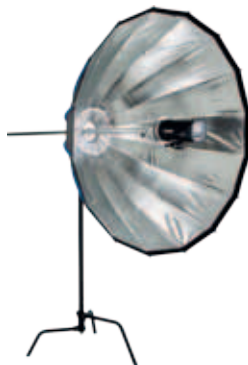

FY3563
Click Box
Zoom 120 cm



FY3562
Click Box
180 cm



FY3561
Click Box
140 cm



¥ FY7512
Plastic
Cover



¥ FY7513
Barn
Door
16.5 cm



¥ FY7514
Barn
Door
21 cm



¥ FY7515
Barn
Door
43 cm



¥ FY7591
Textile plate
for Beauty
Dish
43 cm



¥ FY7521
Color filter
set
7 colors/
16.5 cm



38 HT
Color Filters
Kits, Sheets, Rolls
Check full offer
www.fomei.com



¥ FY7556
Octa Box
150 cm



¥ FY7555
Octa Box
120 cm



¥ FY7554
Octa Box
90 cm



¥ FY7540
Square Box
100 x 100 cm



¥ FY7539
Square Box
80 x 80 cm



¥ FY7538
Square Box
60 x 60 cm



¥ FY7719
Square Box
45 x 45 cm



¥ FY3560
Click Box
120 cm



¥ FY7555
Strip Box
30 x 180 cm



¥ FY7554
Strip Box
60 x 120 cm



¥ FY7540
Strip Box
40 x 120 cm



¥ FY7539
Strip Box
30 x 90 cm



¥ FY7538
Strip Box
30 x 60 cm

Parameters



	Digital Pro X - 1200 FY7824	Digital Pro X - 700 FY3001
Power Energy	1200 Ws	700 Ws
Flash Duration	1/1300 s	1/1500 s
F-stop	90.1 (ISO100, Reflector 16.5cm, 1m)	64.3, ISO 100, (Reflector 16.5 cm, 1m)
Charging Time	0.05-1.2 s	0.05-0.9s
Control Range of Flash Energy	7 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/128 1200 - 9.3 Ws	7 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/128 700 - 5.4 Ws
Colour Temperature	Flash 5500±200K	Flash 5500±200K
Modeling Light	650 W	650 W
Flash Triggering	By Transmitter Pro X A/B/C/D/E groups with 10 channels Synchro cable 6.3mm Jack Photocell	By Transmitter Pro X A/B/C/D/E groups with 10 channels Synchro cable 6.3mm Jack Photocell
Remote Control	App iOs, Android, Mac, Windows	App iOs, Android, Mac, Windows
Cooling	Yes, fan	Yes, fan
Additional function	M mode 1/1-1/128 in 1/10 steps Double Picture - fast masking Safety thermometer Flash counter	M mode 1/1-1/128 in 1/10 steps Double Picture - fast masking Safety thermometer Flash counter
Dimension (L x W x H)	413 x 120 x 255 mm	372 x 120 x 255 mm
Weight	3.8kg	3.1 kg

Parameters



Digital Pro X - 500 FY7823	Digital Pro X - 1200 Boom Light FY9141	Digital Pro X - 500 Boom Light FY9140
500 Ws	1200 Ws	500 Ws
1/2200s	1/1300 s	1/2200 s
45.9 (ISO100, Reflector 16.5cm, 1m)	90.1 (ISO100, Reflector 16.5cm, 1m)	45.9 (ISO100, Reflector 16.5cm, 1m)
0.05-0.8s	0.05-1.2s	0.05-0.8s
7 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/128 500 - 3.9 Ws	7 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/128 1200 - 9.3 Ws	7 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/128 500 - 3.9 Ws
Flash 5500±200K	Flash 5500±200K	Flash 5500±200K
650 W	650 W	650 W
By Transmitter Pro X A/B/C/D/E groups with 10 channels Synchro cable 6.3mm Jack Photocell	By Transmitter Pro X A/B/C/D/E groups with 10 channels Synchro cable 6.3mm Jack Photocell	By Transmitter Pro X A/B/C/D/E groups with 10 channels Synchro cable 6.3mm Jack Photocell
App iOS, Android, Mac, Windows	App iOS, Android, Mac, Windows	App iOS, Android, Mac, Windows
Yes, fan	Yes, fan	Yes, fan
M mode 1/1-1/128 in 1/10 steps Double Picture - fast masking Safety thermometer Flash counter	M mode 1/1-1/128 in 1/10 steps Double Picture - fast masking Safety thermometer Flash counter	M mode 1/1-1/128 in 1/10 steps Double Picture - fast masking Safety thermometer Flash counter
337 x 120 x 255 mm	265 x 125 x 200 mm	337 x 120 x 255 mm
2.8kg	3.8kg	2.8kg



FOMEI s.r.o.
U Libeňského pivovaru 2015/10
180 00 Prague 8
Czech Republic
sls@fomei.com
www.fomei.com

facebook.com/fomeiCZ
instagram.com/fomei