

STUDIO FLASHES



Digitalis Pro S
Digitalis

 **FOMEI**



Photo: Tomas Thurzo



Digitalis Pro S

PROFESSIONAL

A large and clear LCD panel and a strong 300 W light; the flash can be remotely controlled by a transmitter.

HIGH QUALITY, UNIVERSAL CONSTRUCTION, FAST

Digitalis

AFFORDABLE

The quality-price ratio makes the Digitalis Pro S flashes one of the most popular ones among photographers.

Japanese capacitors and a durable construction are a guarantee for a long-lasting life of the device.

Thanks to the variability of the flash body construction, the back panel is always turned in a way that enables you to read it easily.

The time necessary to power the flash is amazingly short, which enables taking pictures in a fast sequence.

Digitalis Pro S - 600/400

Digitalis Pro S600

🛒 FY3034

Digitalis Pro S400

🛒 FY3033





Photo: Erik Tomašák

Transmitter
Canon
FY7312

Transmitter
Nikon
FY7314

Triggering + Remote
Controlling. No HSS




RADIO TRIGGERS **2.4 GHz**
16 CHANNELS

HSS IV, Receiver Nikon/Canon
FY7318



Transmitter TR - 16
FY7829

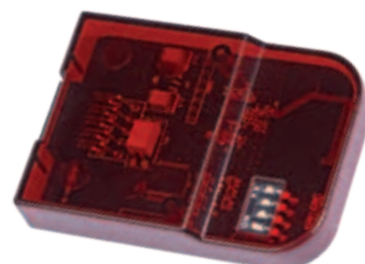

Receiver TR - 16 RFD
FY7859

Digitalis 600/400



Digitalis 600
🛒 FY7772



Digitalis 400
🛒 FY7771



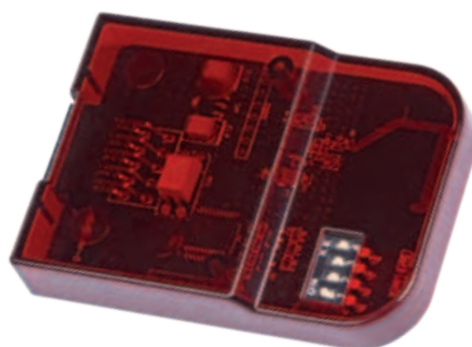


Foto: Dan Vojtěch

RADIO TRIGGERS **2.4 GHz** 16 CHANNELS



Transmitter TR - 16
🛒 FY7829



Receiver TR - 16 RFD
🛒 FY7859

Reflectors



☞ FY7777
Standard
Reflector
16.5 cm



☞ FY7509
Reflector
21 cm



☞ FY7511
Reflector
33 cm



☞ FY7510
Beauty
Dish



☞ FY7507
Background
Reflector



☞ FY7488
Shoot
Reflector
7 cm



☞ FY7506
Shoot
Reflector
5 cm

Softboxes



☞ FY7534
Recta Box
140 x 200 cm



☞ FY7532
Recta Box
100 x 140 cm



☞ FY7531
Recta Box
90 x 120 cm




☞ FY7530
Recta Box
75 x 100 cm



☞ FY7529
Recta Box
60 x 85 cm




☞ FY7557
Octa Box
200 cm

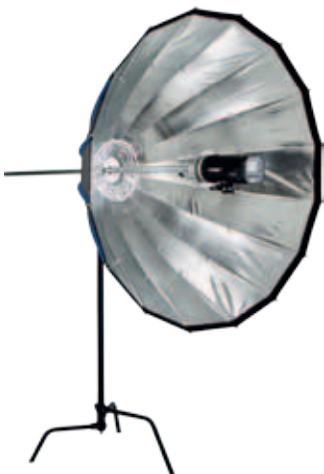

☞ FY3565
Click Box
Zoom 180 cm



☞ FY3564
Click Box
Zoom 140 cm

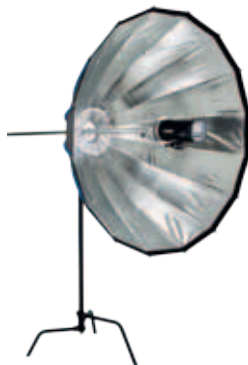

☞ FY3563
Click Box
Zoom 120 cm



☞ FY3562
Click Box
180 cm



☞ FY3561
Click Box
140 cm



¥ FY7512

Plastic
Cover



¥ FY7513

Barn
Door
16.5 cm



¥ FY7514

Barn
Door
21 cm



¥ FY7515

Barn
Door
43 cm



¥ FY7591

Textile plate
for Beauty
Dish
43 cm



¥ FY7521

Color filter
set
7 colors/
16.5 cm



38 HT
Color Filters
Kits, Sheets, Rolls
Check full offer
www.fomei.com



¥ FY7556

Octa Box
150 cm



¥ FY7555

Octa Box
120 cm



¥ FY7554

Octa Box
90 cm



¥ FY7540

Square Box
100 x 100 cm



¥ FY7539

Square Box
80 x 80 cm



¥ FY7538

Square Box
60 x 60 cm



¥ FY7719

Square Box
45 x 45 cm



¥ FY3560

Click Box
120 cm



¥ FY7555

Strip Box
30 x 180 cm



¥ FY7554

Strip Box
60 x 120 cm



¥ FY7540

Strip Box
40 x 120 cm



¥ FY7539

Strip Box
30 x 90 cm



¥ FY7538

Strip Box
30 x 60 cm

Parameters



	Digitalis Pro S600 FY3034	Digitalis Pro S400 FY3033
Power Energy	600 Ws	400 Ws
Flash Duration	1/1700s	1/2300s
F-stop	45 (ISO100, Reflector 16.5cm, 1m)	32.5, (ISO 100, Reflector 16.5cm, 1m)
Charging Time	0.1-1.2s	0.1 - 1.1s
Control Range of Flash Energy	6 F-stop, in 1/10 or 0.5 F-stop intervals 1/1 - 1/32 600 - 12.5 Ws	5 F-stop, in 1/10 or 0.5 f-stop intervals 1/1 - 1/64 400 - 12.5 Ws
Colour Temperature	Flash 5500±200K	Flash 5500±200K
Modeling Light	300 W	300 W
Flash Triggering	Standard Triggering: Transmitter + Receiver TR-16 FY7829 + FY7859 Triggering + Remote control C,N - Triggers HSS-4/S-III HSS Triggering C,N,S - Triggers TRX-32 Synchro cable 6.3mm Jack Photocell	Standard Triggering: Transmitter + Receiver TR-16 FY7829 + FY7859 Triggering + Remote control C,N - Triggers HSS-4/S-III HSS Triggering C,N,S - Triggers TRX-32 Synchro cable 6.3mm Jack Photocell
Remote Control	Triggers HSS-4/S-III	Triggers HSS-4/S-III
Cooling	Yes, fan	Yes, fan
Additional function	M mode 1/1-1/64 in 1/10 or 0,5 steps Modeling Light: Proporcional ON/OFF	M mode 1/1-1/32 in 1/10 or 0,5 steps Modeling Light: Proporcional ON/OFF
Dimension (L x W x H)	337 x 120 x 255mm	276 x 120 x 255mm
Weight	2.6kg	2.3kg

Parameters



	Digitalis 600 FY7772	Digitalis 400 FY7771
Power Energy	600 Ws	400 Ws
Flash Duration	1/1700s	1/2300s
F-stop	45 (ISO100, Reflector 16.5cm, 1m)	32,4 (ISO100, Reflector 16.5cm, 1m)
Charging Time	0.1-1.1s	0.1-1.1s
Control Range of Flash Energy	4.5 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/24 600 - 28 Ws	4.5 F-stop, in 1/10 or full f-stop intervals 1/1 - 1/24 400 - 18.75 Ws
Colour Temperature	Flash 5500±200K	Flash 5500±200K
Modeling Light	75 W	75 W
Flash Triggering	Standard Triggering: Transmitter + Receiver TR-16 FY7829 + FY7859 Synchro cable 6.3mm Jack Photocell	Standard Triggering: Transmitter + Receiver TR-16 FY7829 + FY7859 Synchro cable 6.3mm Jack Photocell
Remote Control	No	No
Cooling	Yes, fan	Yes, fan
Additional function	M mode 1/1-1/24 Modeling Light: Proporcional ON/OFF	M mode 1/1-1/24 Modeling Light: Proporcional ON/OFF
Dimension (L x W x H)	385 x 115 x 120mm	276 x 120 x 255mm
Weight	2.7 kg	2.3kg



FOMEI s.r.o.
U Libeňského pivovaru 2015/10
180 00 Prague 8
Czech Republic
sls@fomei.com
www.fomei.com

facebook.com/fomeiCZ
instagram.com/fomei

